




TechnoGuard

DATA CENTER SERVICES

CONTAINMENT DOOR SPECIFICATIONS



technoguardinc.com

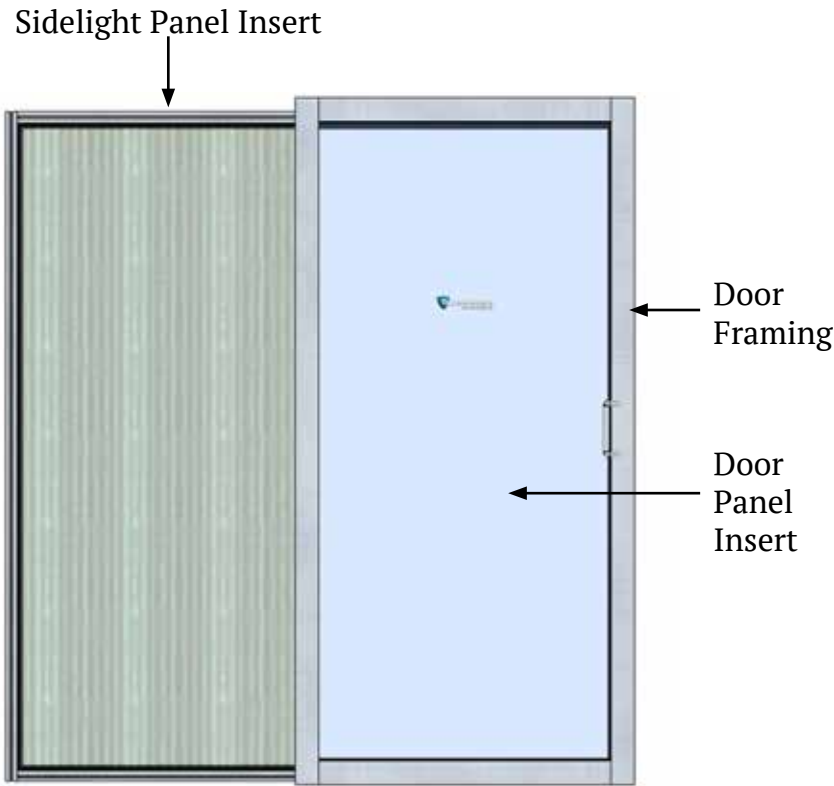

FEATURES

- Auto Closing
- Soft Closing
- Clear Panels
- No Threshold

OPTIONS

- Custom Sizes
- Right or Left Hand Opening
- Hold-Open

PANEL INSERT OPTIONS

3mm Clear Polycarbonate

Property	Test	Result
Flame Spread Index	ASTM E 84	5
Smoke Developed	ASTM E 84	250
Max Air Temp	ASTM E 84	544°F
Horizontal Burn	ASTM D 635-14	0.0 mm/min.

6mm Polycarbonate Multiwall

Property	Test	Result
Flame Spread Index	ASTM E 84	0
Smoke Developed	ASTM E 84	85


8mm Polycarbonate Multiwall

Property	Test	Result
Flame Spread Index	ASTM E 84	5
Smoke Developed	ASTM E 84	250

DOOR FRAMING

1.5" x 3" Anodized Aluminum

Property	Result
Yield Strength	35,000 psi
Weight	0.1674 lbs/inch

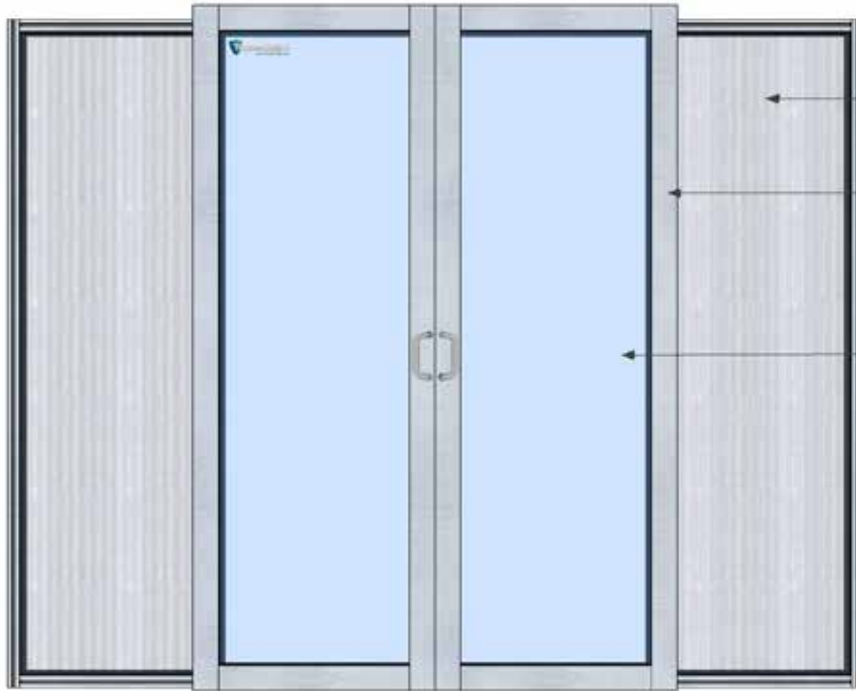

FEATURES

- Auto Closing
- Soft Closing
- Clear Panels
- No Threshold

OPTIONS

- Custom Sizes
- Right or Left Hand Opening
- Hold-Open

PANEL INSERT OPTIONS

3mm Clear Polycarbonate

Property	Test	Result
Flame Spread Index	ASTM E 84	5
Smoke Developed	ASTM E 84	250
Max Air Temp	ASTM E 84	544°F
Horizontal Burn	ASTM D 635-14	0.0 mm/min.

6mm Polycarbonate Multiwall

Property	Test	Result
Flame Spread Index	ASTM E 84	0
Smoke Developed	ASTM E 84	85


8mm Polycarbonate Multiwall

Property	Test	Result
Flame Spread Index	ASTM E 84	5
Smoke Developed	ASTM E 84	250

DOOR FRAMING

1.5" x 3" Anodized Aluminum

Property	Result
Yield Strength	35,000 psi
Weight	0.1674 lbs/inch

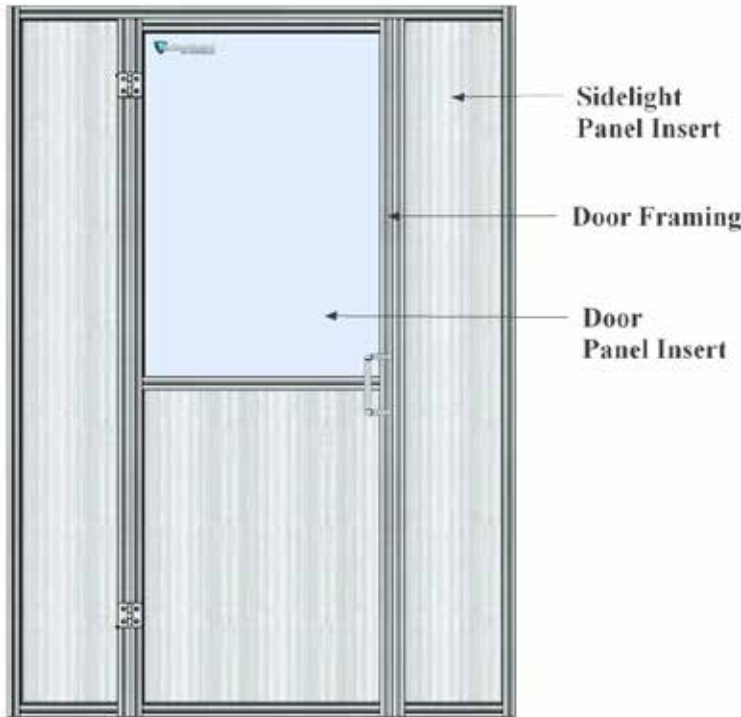

FEATURES

- Auto Closing
- Soft Closing w/Adjustable Damper
- Hold-Open
- Clear Panels
- No Threshold

OPTIONS

- Custom Sizes
- Right or Left Hand Opening

PANEL INSERT OPTIONS

3mm Clear Polycarbonate

Property	Test	Result
Flame Spread Index	ASTM E 84	5
Smoke Developed	ASTM E 84	250
Max Air Temp	ASTM E 84	544°F
Horizontal Burn	ASTM D 635-14	0.0 mm/min.

6mm Polycarbonate Multiwall

Property	Test	Result
Flame Spread Index	ASTM E 84	0
Smoke Developed	ASTM E 84	85


8mm Polycarbonate Multiwall

Property	Test	Result
Flame Spread Index	ASTM E 84	5
Smoke Developed	ASTM E 84	250

DOOR FRAMING

1.5" x 3" Anodized Aluminum

Property	Result
Yield Strength	35,000 psi
Weight	0.1674 lbs/inch

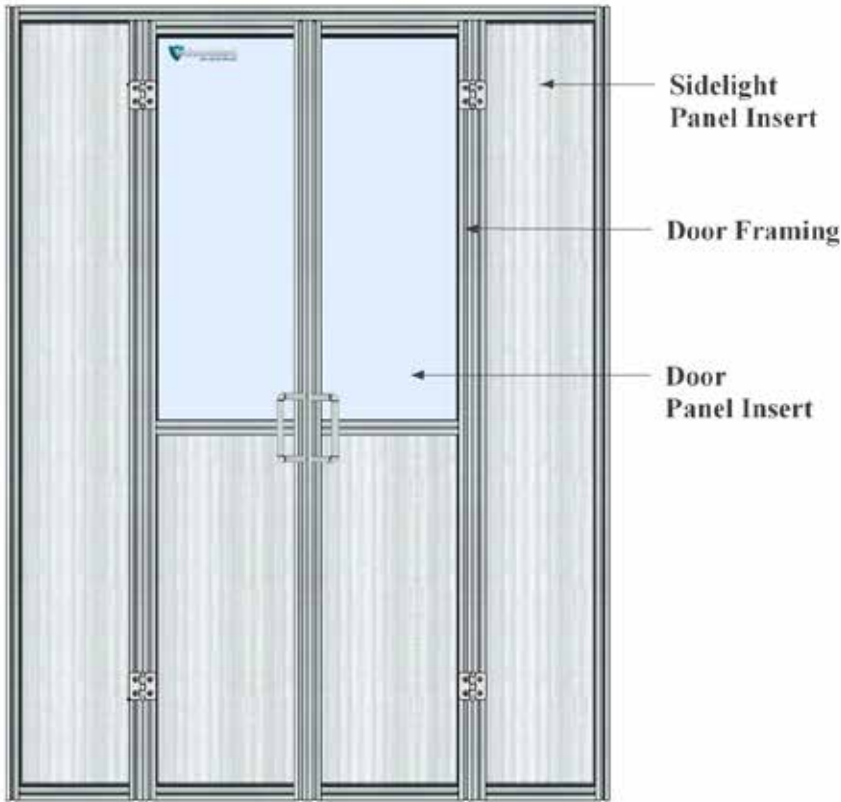

FEATURES

- Clear Panels
- No Threshold
- Magnetic Catch

OPTIONS

- Custom Sizes
- Right or Left Hand Opening

PANEL INSERT OPTIONS

3mm Clear Polycarbonate

Property	Test	Result
Flame Spread Index	ASTM E 84	5
Smoke Developed	ASTM E 84	250
Max Air Temp	ASTM E 84	544°F
Horizontal Burn	ASTM D 635-14	0.0 mm/min.

6mm Polycarbonate Multiwall

Property	Test	Result
Flame Spread Index	ASTM E 84	0
Smoke Developed	ASTM E 84	85

8mm Polycarbonate Multiwall

Property	Test	Result
Flame Spread Index	ASTM E 84	5
Smoke Developed	ASTM E 84	250

DOOR FRAMING

1.5" x 3" Anodized Aluminum

Property	Result
Yield Strength	35,000 psi
Weight	0.086 lbs/inch